




Focal length: 15mm Exposure: F/11 0.6 sec ISO400 © Ian Plant

<b>Model</b>	A012	<b>Filter Size</b>	N/A	[A012 Lens Construction] <span style="color: yellow;">■</span> LD (Low Dispersion) element <span style="color: orange;">■</span> Molded-Glass Aspherical element <span style="color: red;">■</span> XGM (eXpanded Glass Molded Aspherical) lens element
<b>Focal Length</b>	15-30mm	<b>Maximum Diameter</b>	φ98.4mm	
<b>Maximum Aperture</b>	F/2.8	<b>Length*1</b>	for Canon 145mm (5.7 in)* for Nikon 142.5mm (5.6 in)*	
<b>Angle of View (diagonal)</b>	110°32'~71°35' (for full-frame format) 85°52'~49°54' (for APS-C format)	<b>Weight</b>	1,100g (38.8 oz)*	
<b>Lens Construction</b>	18 elements in 13 groups	<b>Diaphragm Blade Number</b>	9 (circular diaphragm blades)*2	
<b>Minimum Focus Distance</b>	0.28m (11 in)	<b>Minimum Aperture</b>	F/22	
<b>Max. Magnification Ratio</b>	1:5 (at f=30mm: MFD 0.28m)	<b>Standard Accessories</b>	Lens caps (push-on front, rear)	
		<b>Hood</b>	Integrated flower-shaped hood	
		<b>Compatible Mounts</b>	Canon, Nikon, Sony*3	





SP15-30mm F/2.8 Di VC USD for Canon, Nikon SP15-30mm F/2.8 Di USD for Sony  
Di lens designed for APS-C format and full-frame DSLR cameras. Model: A012

Specifications, appearance, functionality, etc. may be changed without prior notice.

\*Length and weight are based on figures for the Canon-mount lens and the Nikon-mount lens.  
\*1 Length is the distance from the front tip of the lens to the lens mount face.

\*2 The circular diaphragm stays almost perfectly circular up to two stops down from maximum aperture.

\*3 The Sony mount version does not include VC since Sony digital SLR bodies incorporate built-in image stabilization functionality.

SP 15-30mm F/2.8  

for Canon / Nikon / Sony

**TAMRON**  
New eyes for industry

Uncompromising quality.  
Now in a full-frame  
ultra-wide-angle zoom.



# SP 15-30mm

F/2.8 Di VC USD for Canon, Nikon

F/2.8 Di USD for Sony\*

Introducing the world's first\*\* F/2.8  
ultra-wide-angle zoom lens with image stabilization.

\*The Sony mount version does not include VC since Sony digital SLR bodies incorporate built-in image stabilization functionality.  
\*\* For F/2.8 ultra-wide-angle zoom lens for full-frame DSLR cameras (As of November 2014. Source: Tamron)

[www.tamron.in](http://www.tamron.in)



SP 70-200mm  
F/2.8 Di

SP 15-30mm  
F/2.8 Di

SP 24-70mm  
F/2.8 Di

From wide-angle to telephoto,  
lenses made for ultimate quality

Since 2012, Tamron has been continuously expanding its lineup of SP (Super Performance) interchangeable lenses for full-frame DSLR cameras. Using the finest materials and state-of-the-art technology, they are designed for photographers that demand the very best.

**Caution:** Please read the instruction manual carefully before using the lens.

A12-EG-112-M-1412-0210

**TAMRON**

Manufacturer of precise and sophisticated optical products  
for a broad range of industries.

**TAMRON INDIA PVT. LTD.**

#801, 8<sup>th</sup> Floor, Time Tower, M.G. Road, Sector-28, Gurgaon, Haryana  
Tel.: +91-124-4116812/13/14 Helpline No.: +91-9650061715  
E-mail: [info@tamron.in](mailto:info@tamron.in) Website: [www.tamron.in](http://www.tamron.in)



Management on Quality and Environment  
Tamron is certified with international standards: ISO 9001 for quality and ISO 14001 for environmental management at its headquarters, and ISO 14001 for environmental management at its three production facilities in Aomori, Japan, and is fully committed to striving for continued and sustainable improvement at all levels and facets of its business operations.

Note: Information valid as of December 2014. Information in this publication is subject to change at any time without prior notice.



Focal length: 15mm Exposure: F/14 1/10 sec ISO100 © Ian Plant

### Superb corner-to-corner image quality from an ultra-wide-angle zoom

Tamron aims for the highest standards with the SP (Super Performance) lens series. And the new 15-30mm F/2.8 full-frame ultra-wide-angle zoom is a worthy addition. This high-performance zoom lens equals the performance of fixed focal length lenses from 15mm to 30mm, an unprecedented achievement made possible by the development of its unique XGM (eXpanded Glass Molded Aspherical) lens element that effectively controls aberrations and enhances sharpness. In addition, the 15-30mm is the first zoom to combine such a wide range of coverage, a fast F/2.8 aperture, and to offer image stabilization, further proof of Tamron's commitment to innovation and excellence.



Focal length: 15mm Exposure: F/11 3.2 sec ISO100 © Ian Plant

### XGM lens element for exquisite images


A large diameter XGM (eXpanded Glass Molded Aspherical) lens element is placed in the first lens group of a system that also includes several LD (Low Dispersion) elements in its 18-element, 13-group optical design. This combination effectively controls distortion and chromatic aberrations that typically affect wide-angle lenses.



Compared to a previous Molded-Glass Aspherical element (left), XGM has a larger aspherical surface.

### eBAND and BBAR Coating

Tamron's proprietary eBAND (Extended Bandwidth & Angular-Dependency) Coating suppresses tangential reflections, while a new generation of BBAR (Broad-Band Anti-Reflection) Coating has been optimized for ultra-wide angles of view. Together, they effectively correct ghosting and flare, yielding vivid images of extraordinary clarity.

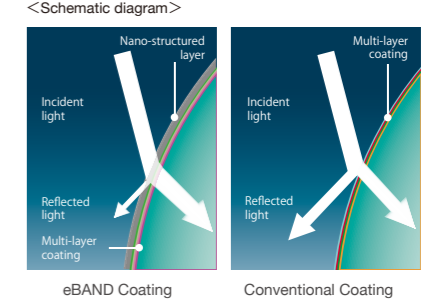

### Vibration Compensation enhances photo opportunities

Responding to the demand for a wide-angle lens suited for handheld shooting at slow shutter speeds, Tamron has created the world's first F/2.8 ultra-wide-angle zoom lens with image stabilization. The result is a lens able to capture sharp images even when shooting handheld under low light conditions.

### Soft-focus backgrounds at wide-angle settings

Thanks to its large F/2.8 aperture, this lens lets you soften the foreground or background to dramatically emphasize the subject. And with a minimum focusing distance of 0.28m over its entire focal-length range, it can capture wide-macro effects.



Focal length: 30mm Exposure: F/2.8 1/20 sec ISO100

### Fluorine coated front element

Since its large diameter and prominent convex profile prevents deployment of a protective filter, the front element of this lens has a fluorine coating that repels water and dirt, and makes it much easier to remove smudges as well.



With fluorine coating Without fluorine coating

### Resistant to the elements

Moisture-resistant construction helps prevent moisture from penetrating the lens.



### Ultrasonic Silent Drive for precise, and quiet autofocus

The quiet high-torque USD motor ensures autofocusing with precision.



<Built-in USD>